

VISOR® Multishot


Minimal height differences in full view.



VisionSystems
DESIGN
2017 Innovators
Awards
SILVER

VISOR® Multishot

A clear view of previously invisible details.

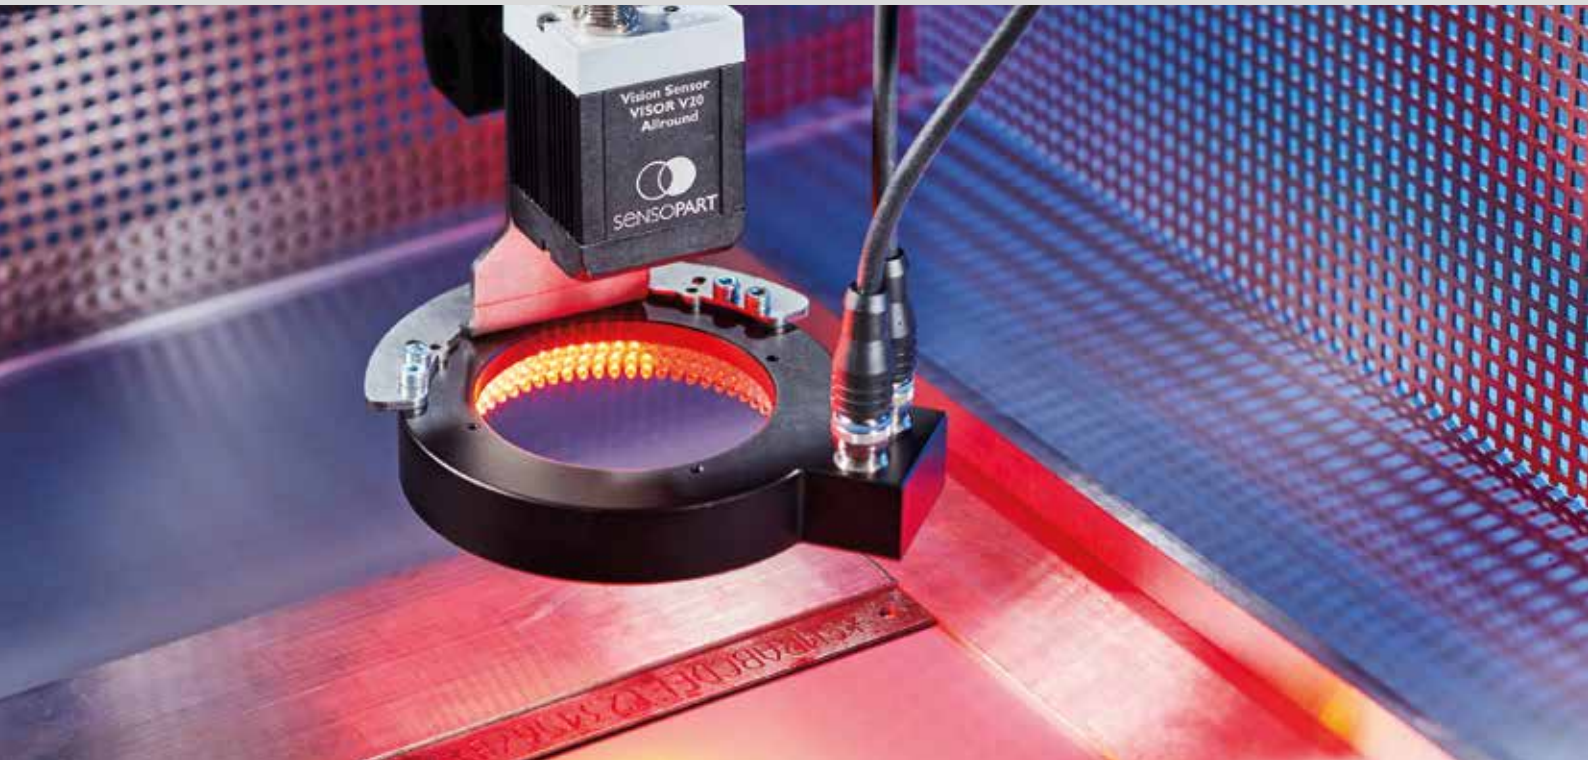

Raised or recessed object details – such as embossed digits and characters on a credit card – are difficult to detect with standard image processing methods. Even use of lateral lighting generally results in poorly identifiable contours due to overexposure and shadows. The solution comes in the shape of SensoPart's VISOR® vision sensor series with the new multishot function.

Contours now stand out clearly so that raised or recessed letters and digits can be easily read, e.g. using the vision sensor's OCR function. Other application examples for VISOR® Multishot include the reading of data matrix codes moulded directly into plastic surfaces, detection of damage such as dents or scratches, or the recognition of raised adhesive beads on the same colored background.

This technology can even be used exclusively with the VISOR®'s internal lighting system – a feature which makes the sensor unique on the market. External lighting can be dispensed with altogether when detecting small details, particularly from a short distance. This reduces complex cabling and saves time, space and of course money.

Changing background colors – a frequent occurrence in the packaging industry – can be eliminated entirely from image processing thanks to multishot technology. Analysis is then based solely on detected height differences.

Finally, a VISOR® equipped with the multishot function can also take and analyze a picture with a standard lighting configuration, in addition to a height image, as it is possible to simply switch between multishot and standard lighting at any time. This therefore also enables part inspection with traditional image processing tools, such as pattern matching, contour detection, distance measurement or code reading.













The optional multishot ring light with four area lights is available as a pre-mounted accessory. The multishot function is now available in all new VISOR® devices in the version 'Allround Professional'.

VISOR® Multishot

VISOR® V20 Allround Professional. Position tracking: pattern matching, contour, edge detection. Detectors: barcode, data code, OCR, contour, contrast, brightness, grey threshold, calliper, Blob. 255 jobs with 255 detectors, 10 IO channels, encoder input, interface to IO-Box, RS232, RS422, Ethernet, EtherNet/IP, PROFINET

| | | | |
|-----------|----------------|-----------------------------------|---|
| 536-91040 | V20-ALL-P2-W12 | Focal length 12 mm, white LEDs |  |
| 536-91041 | V20-ALL-P2-R12 | Focal length 12 mm, red LEDs | |
| 536-91042 | V20-ALL-P2-I12 | Focal length 12 mm, infrared LEDs | |
| 536-91043 | V20-ALL-P2-C | C/CS mount | |

VISOR® Multishot Illuminations

| Image | Type | Description/ Application | Image original | with Multishot |
|---|---|---|---|---|
|  | Internal Illumination | For small parts, distance < 50mm, like detection of single characters |  |  |
|  | LM300 WWK-24Q4-2L12 LM300 RWK-24Q4-2L12 LM300 IWK-24Q4-2L12 | Very powerful setup for applications with big fields of view like DMC-codes molded directly in plastic |  |  |
|  | LM100 WWK-24Q4-2L12 LM100 RWK-24Q4-2L12 | Ring light, angled, 100 mm, for OCR-reading of fonts or DMC-codes with thin lines engraved in iron sheets |  |  |
|  | LM325 RD-24Q4-kML5 | Diffuse DOME 325 mm, for detection of scratches on very shiny parts |  |  |



“We gauge ourselves not by what is possible today, but by our vision of what can be achieved” – this has been our motto since the foundation of SensoPart in 1994. Our goal is to always be a step ahead and to be able to offer our customers the most innovative sensor for industrial automation.

With our easy to integrate VISOR® Vision sensors and our compact laser sensors with an amazing background suppression made in Germany, we stick up to this motto.

Get ready – we still have a lot of ideas for the future.

SENSOR TECHNOLOGY

- Light barriers
- Proximity switches
- Laser sensors
- Miniature sensors
- Distance sensors
- Color sensors
- Contrast sensors
- Anti-collision sensors
- Slot sensors
- Fibre-optic amplifiers
- Inductive sensors
- Capacitive sensors
- Ultrasonic sensors
- Vision sensors
- Smart cameras
- Vision systems
- Object detection
- Object measurement
- Color detection
- Code reading
- Lighting
- Lenses

Germany
SensoPart
Industriesensorik GmbH
79288 Gottenheim
Tel. +49 7665 94769-0
info@sensopart.de

France
SensoPart France SARL
77420 Champs sur Marne
Tel. +33 164 730061
info@sensopart.fr

Großbritannien
SensoPart UK Limited
Pera Business Park, Nottingham Road,
Melton Mowbray, Leicestershire, LE13 0PB
Tel. +44 1664 561539
uk@sensopart.com

USA
SensoPart Inc.
Perrysburg OH 43551,
Tel. +1 866 282-7610
usa@sensopart.com

China
SensoPart China
201803 Shanghai
Tel. +86 21 69017660
china@sensopart.cn